

FIG. 1

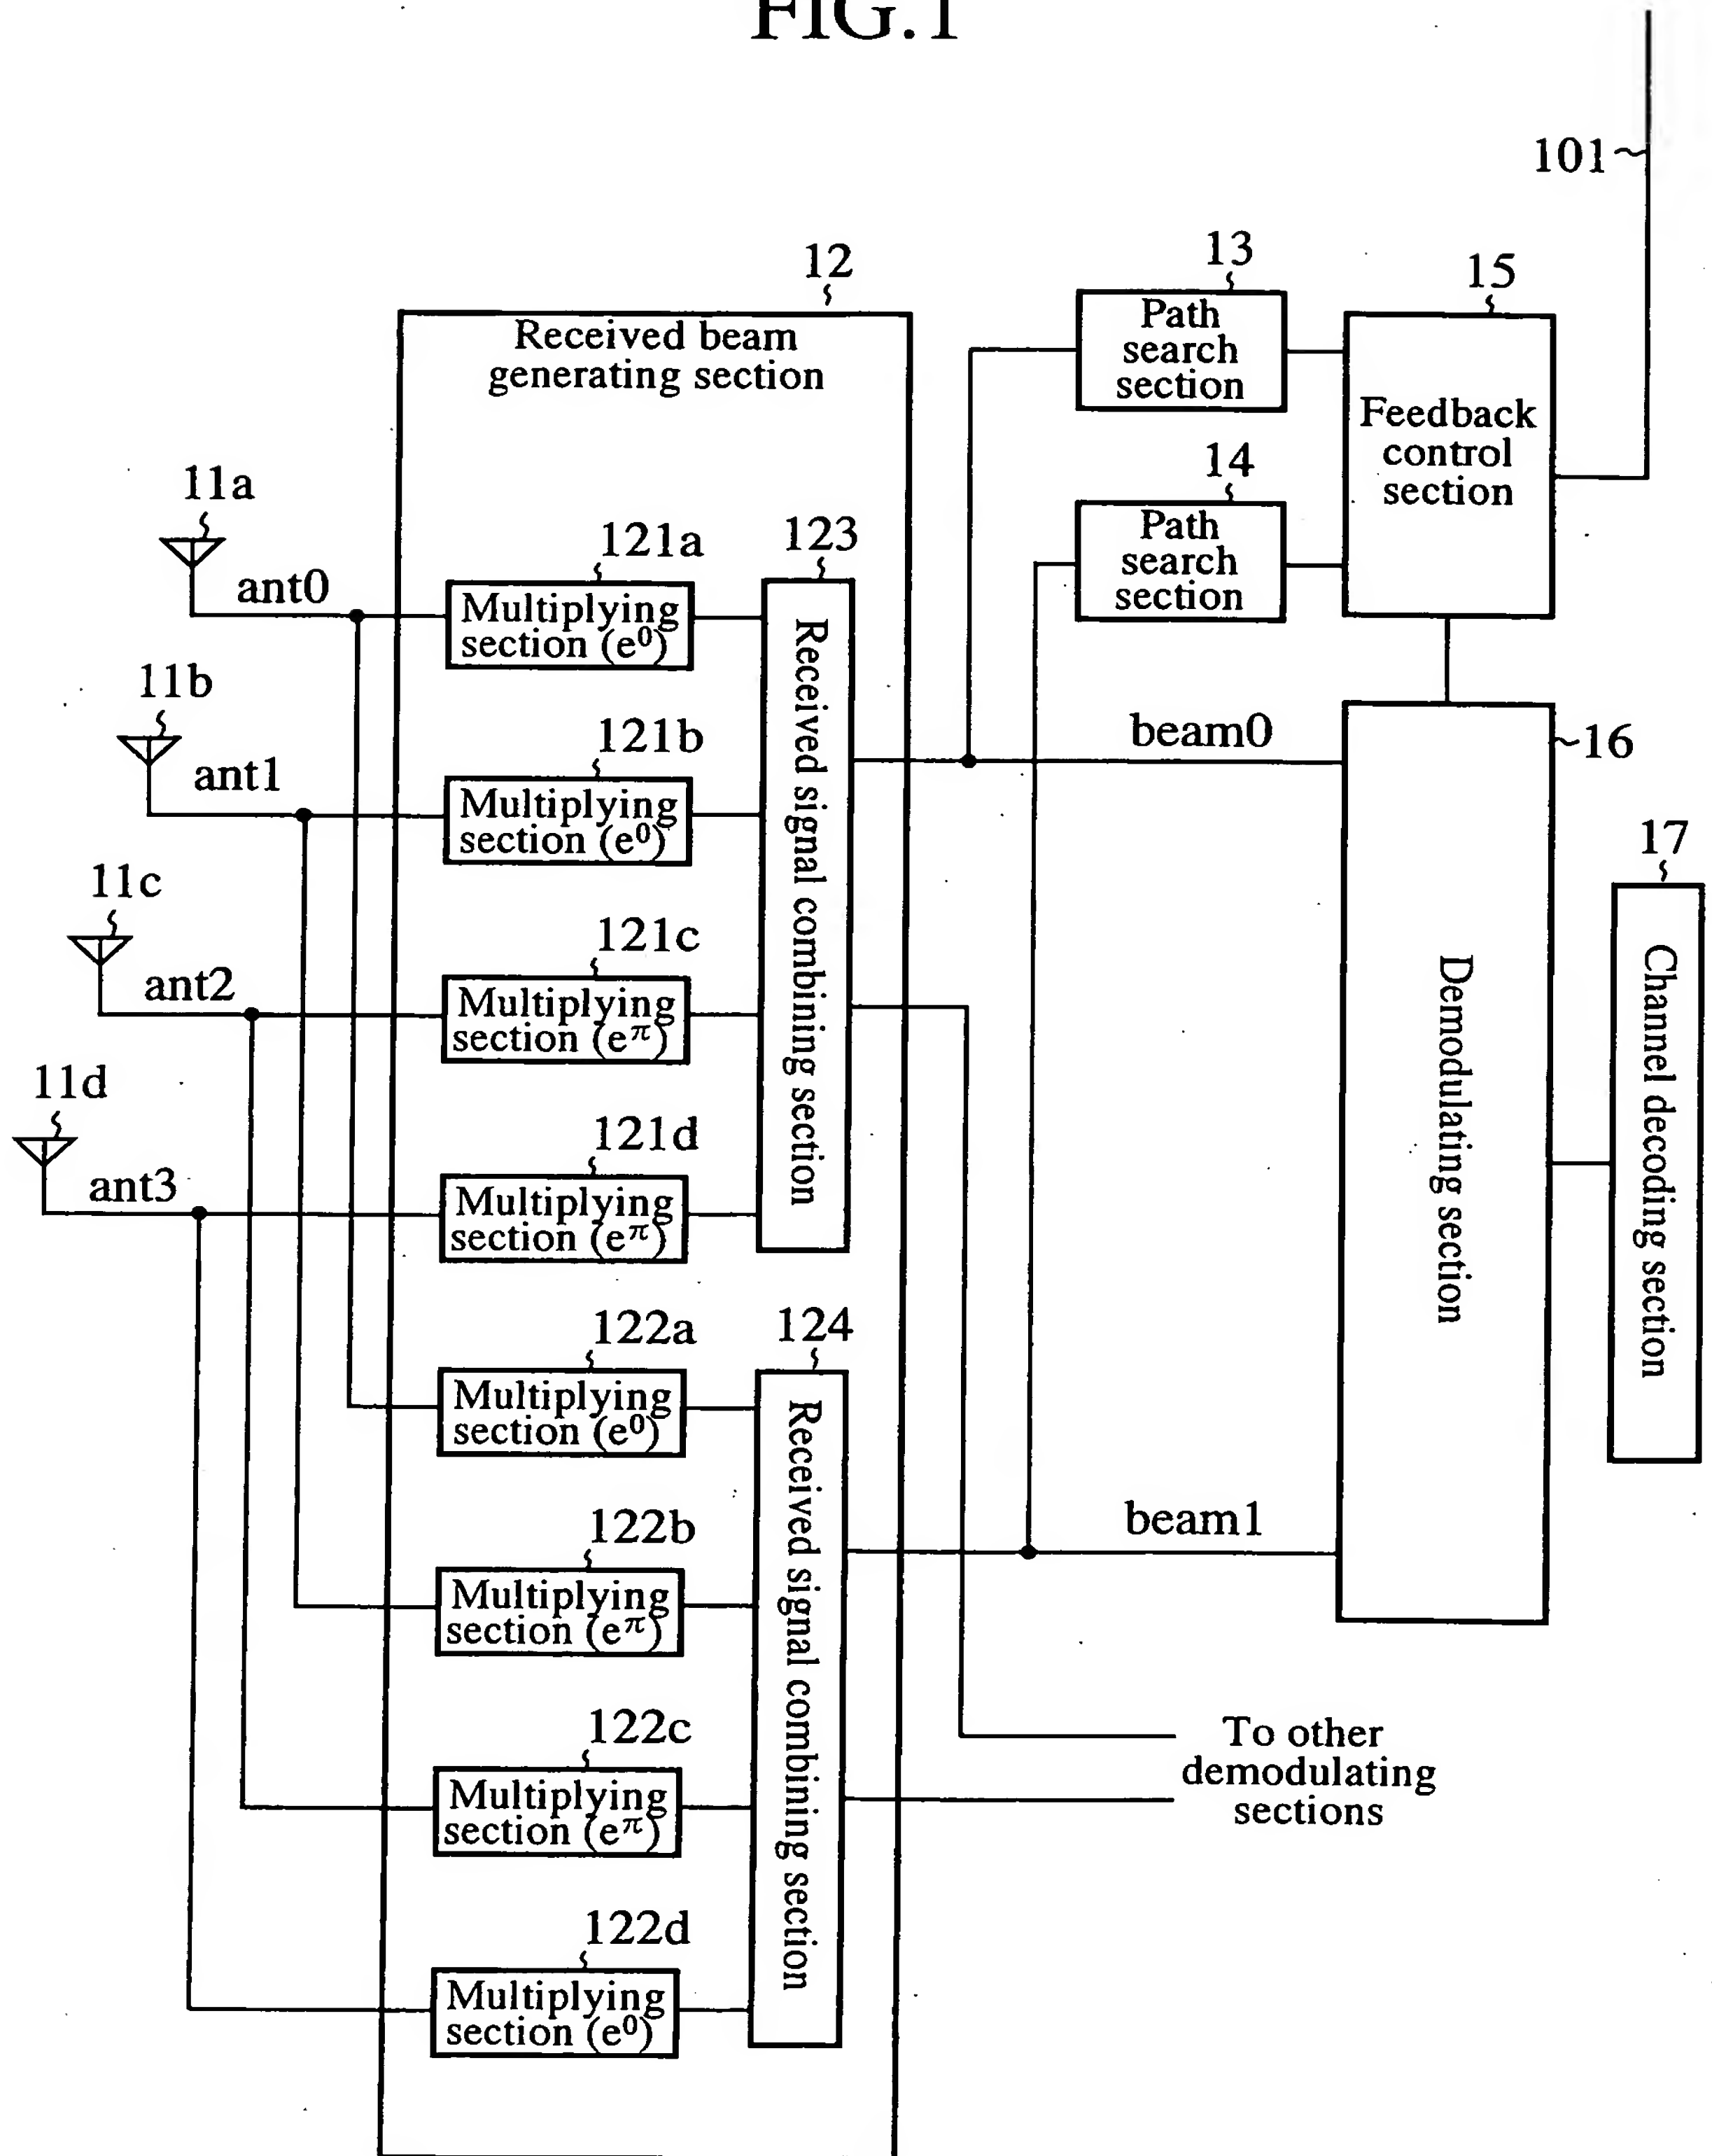


FIG. 2

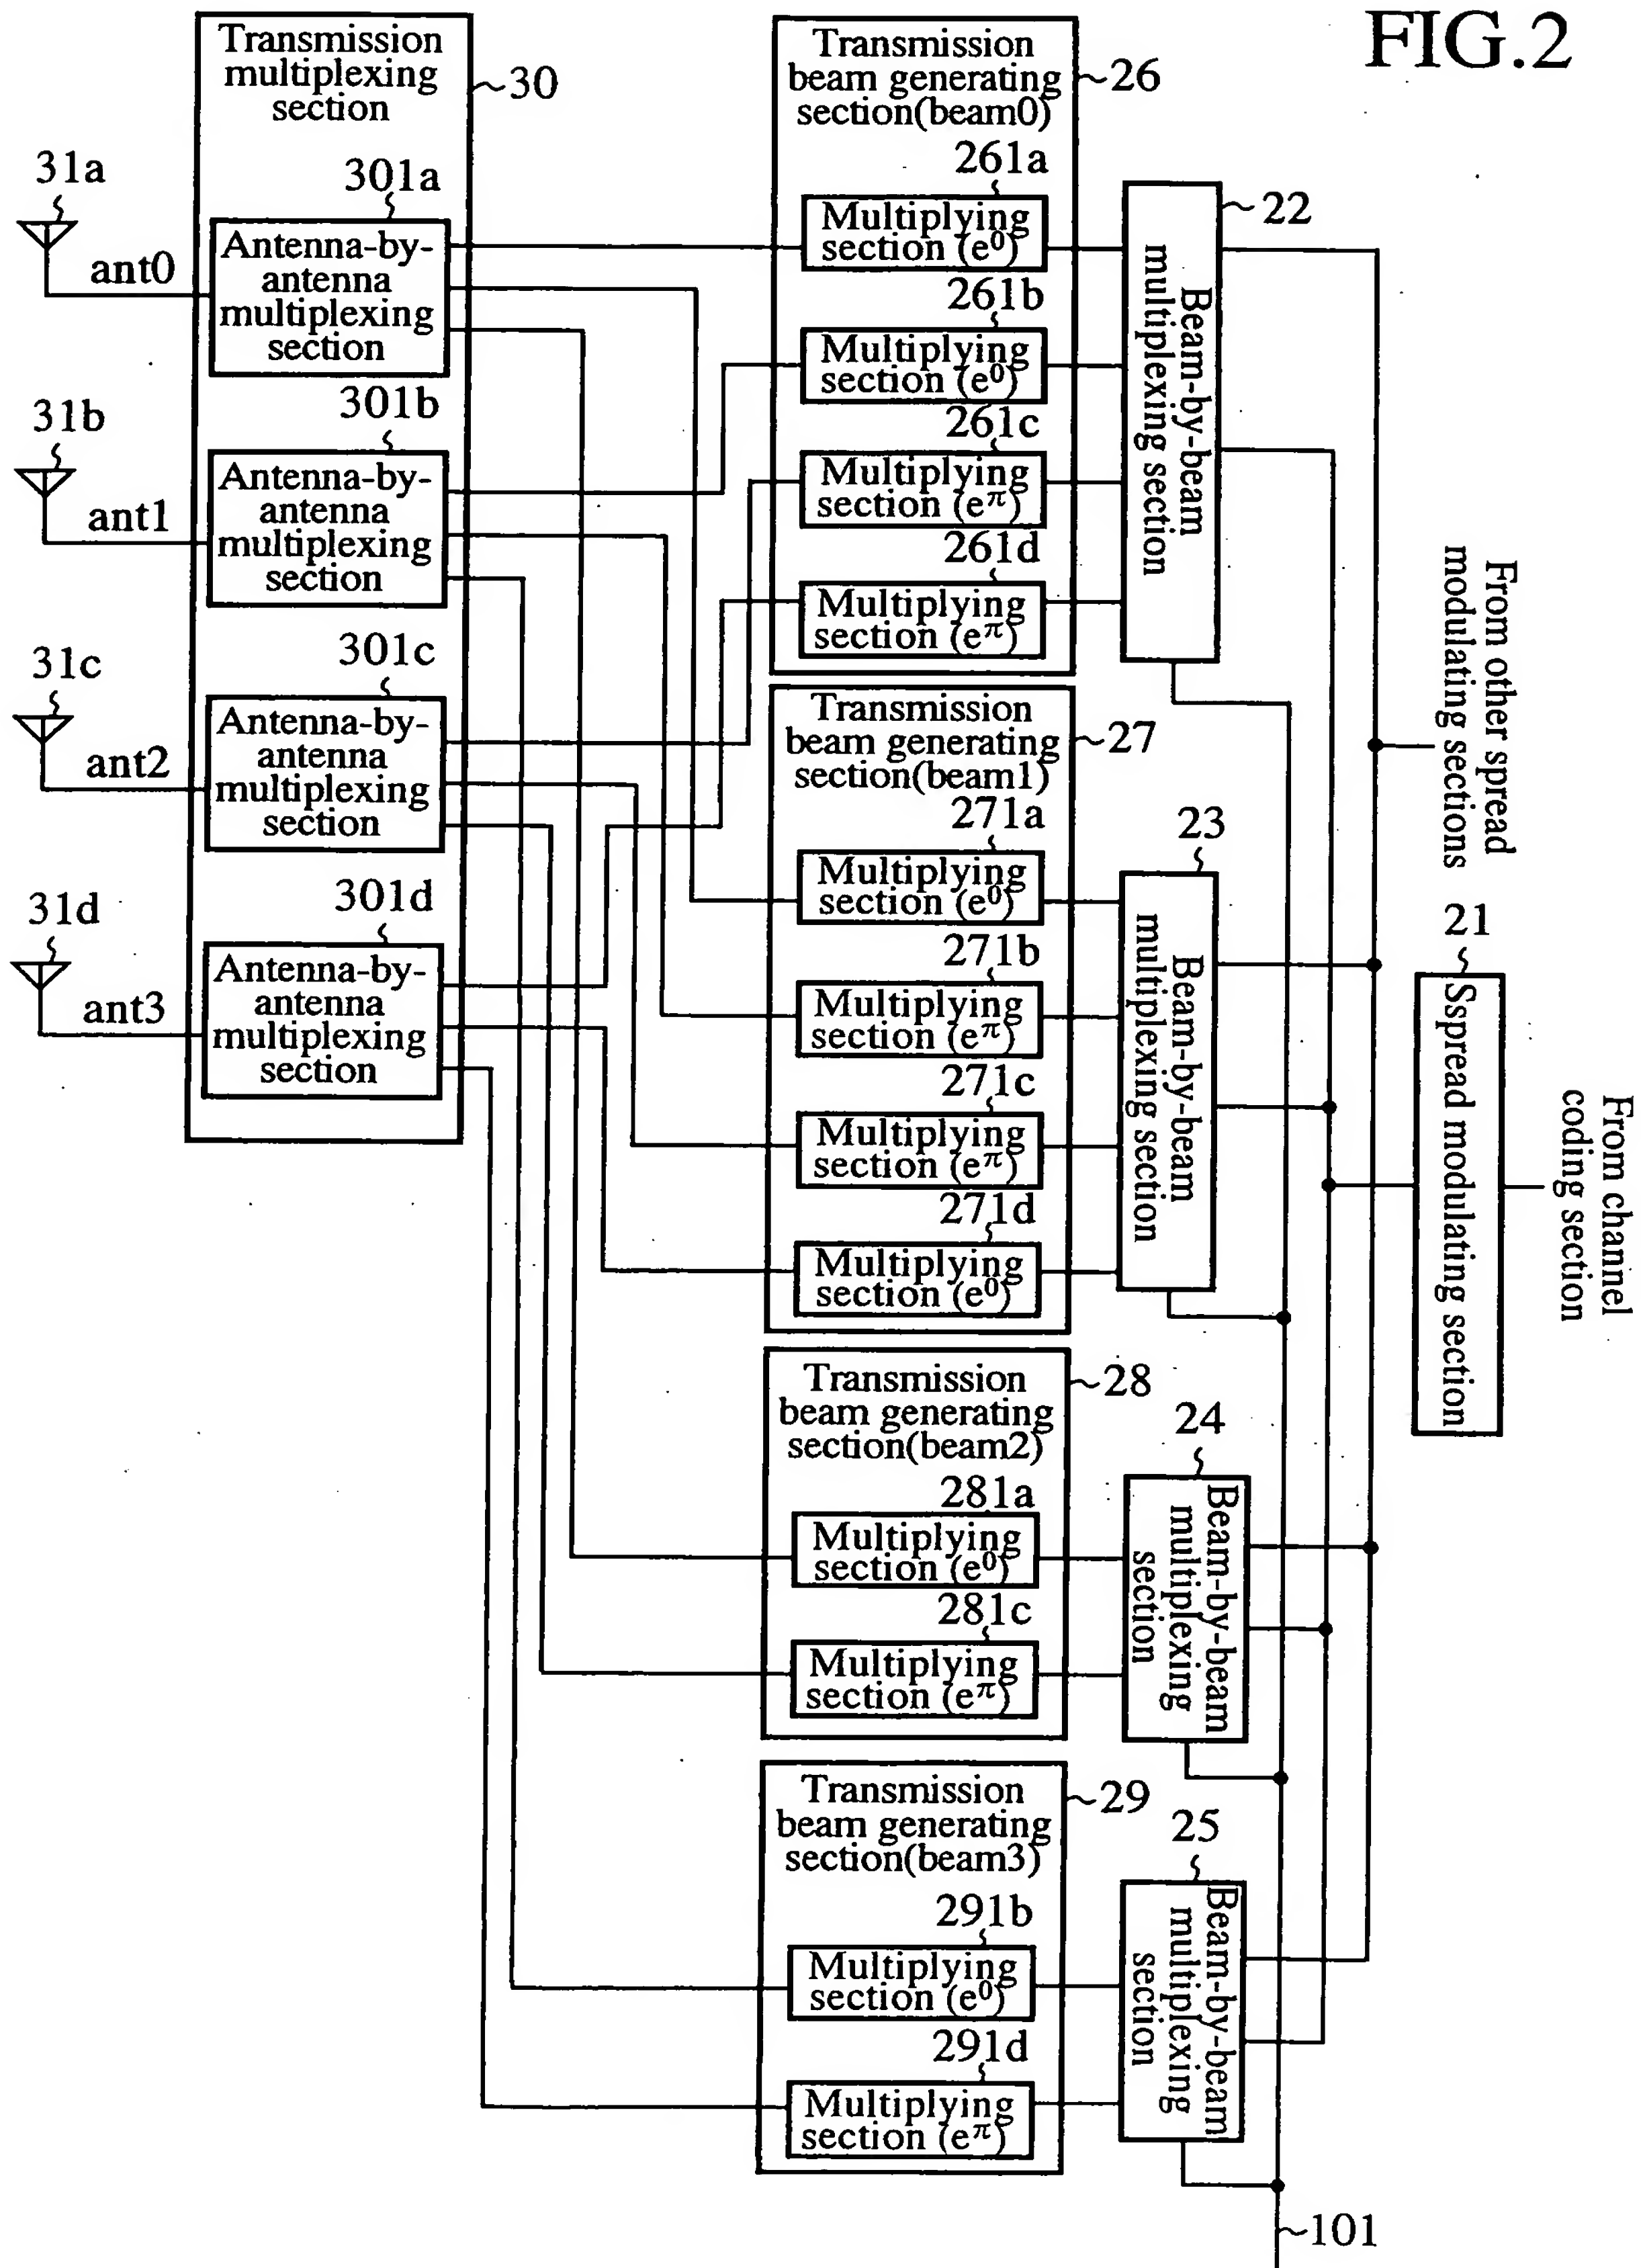


FIG.3


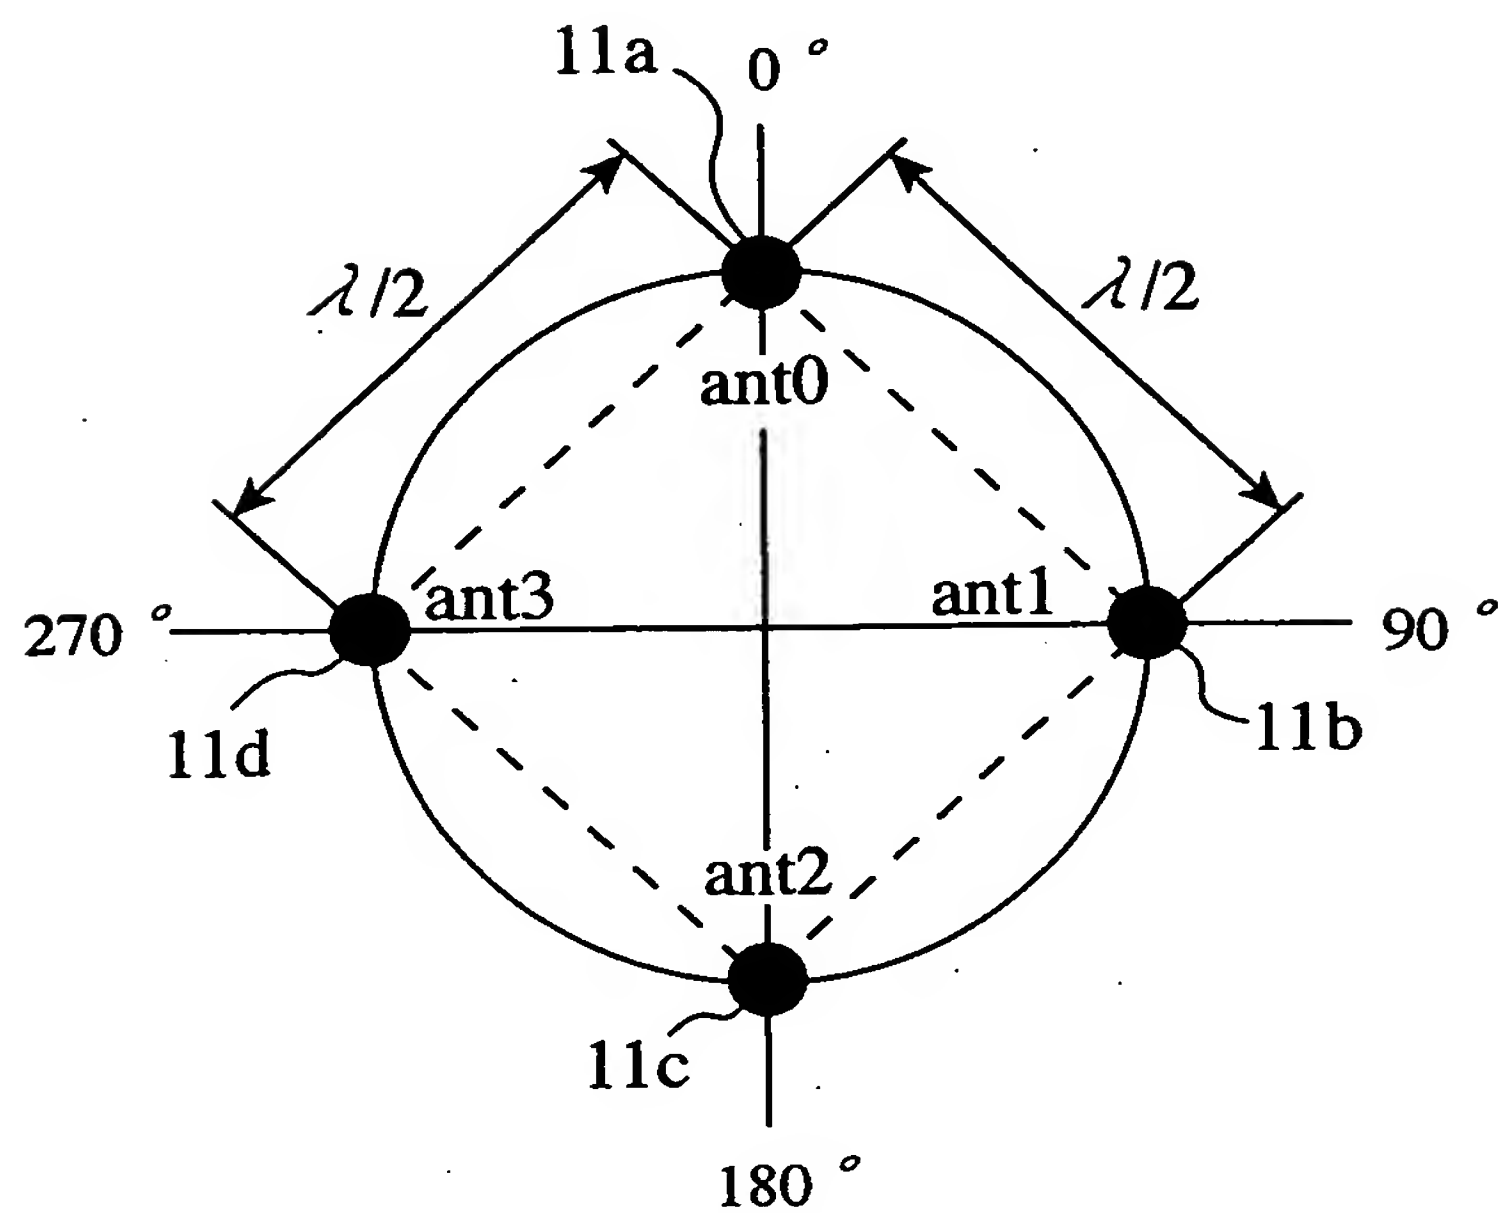


FIG.4

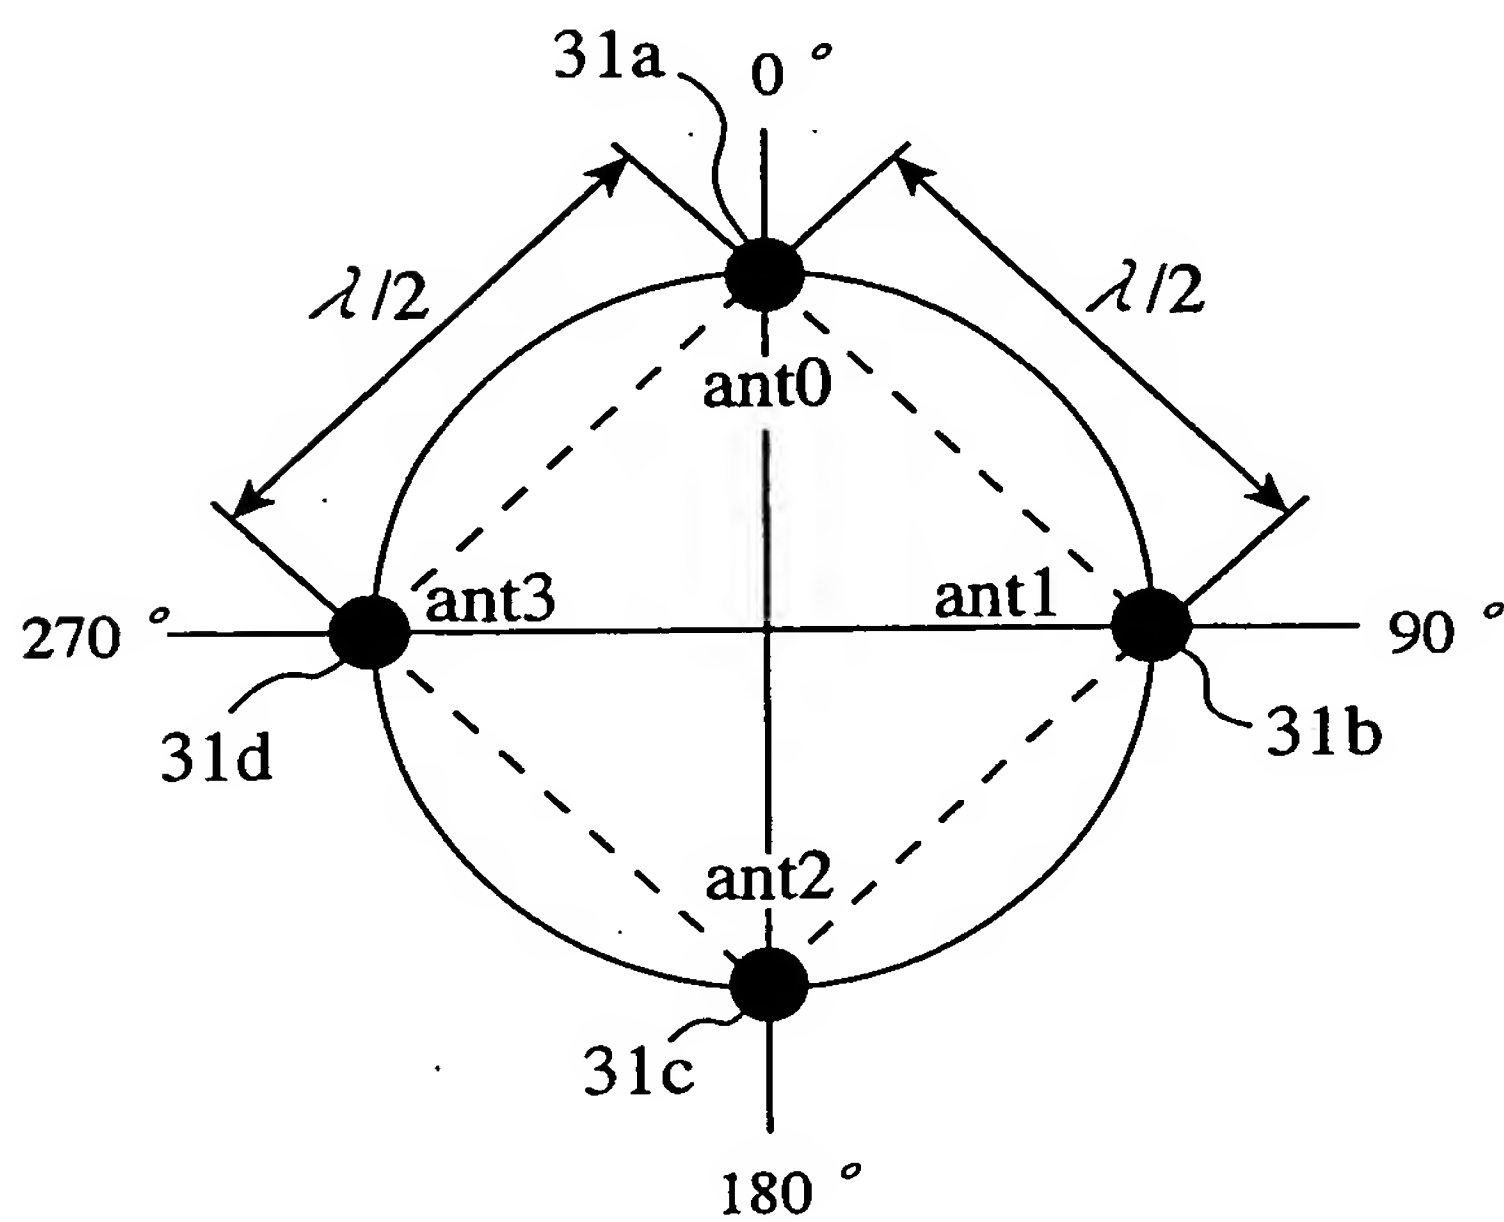

4/7

FIG.5

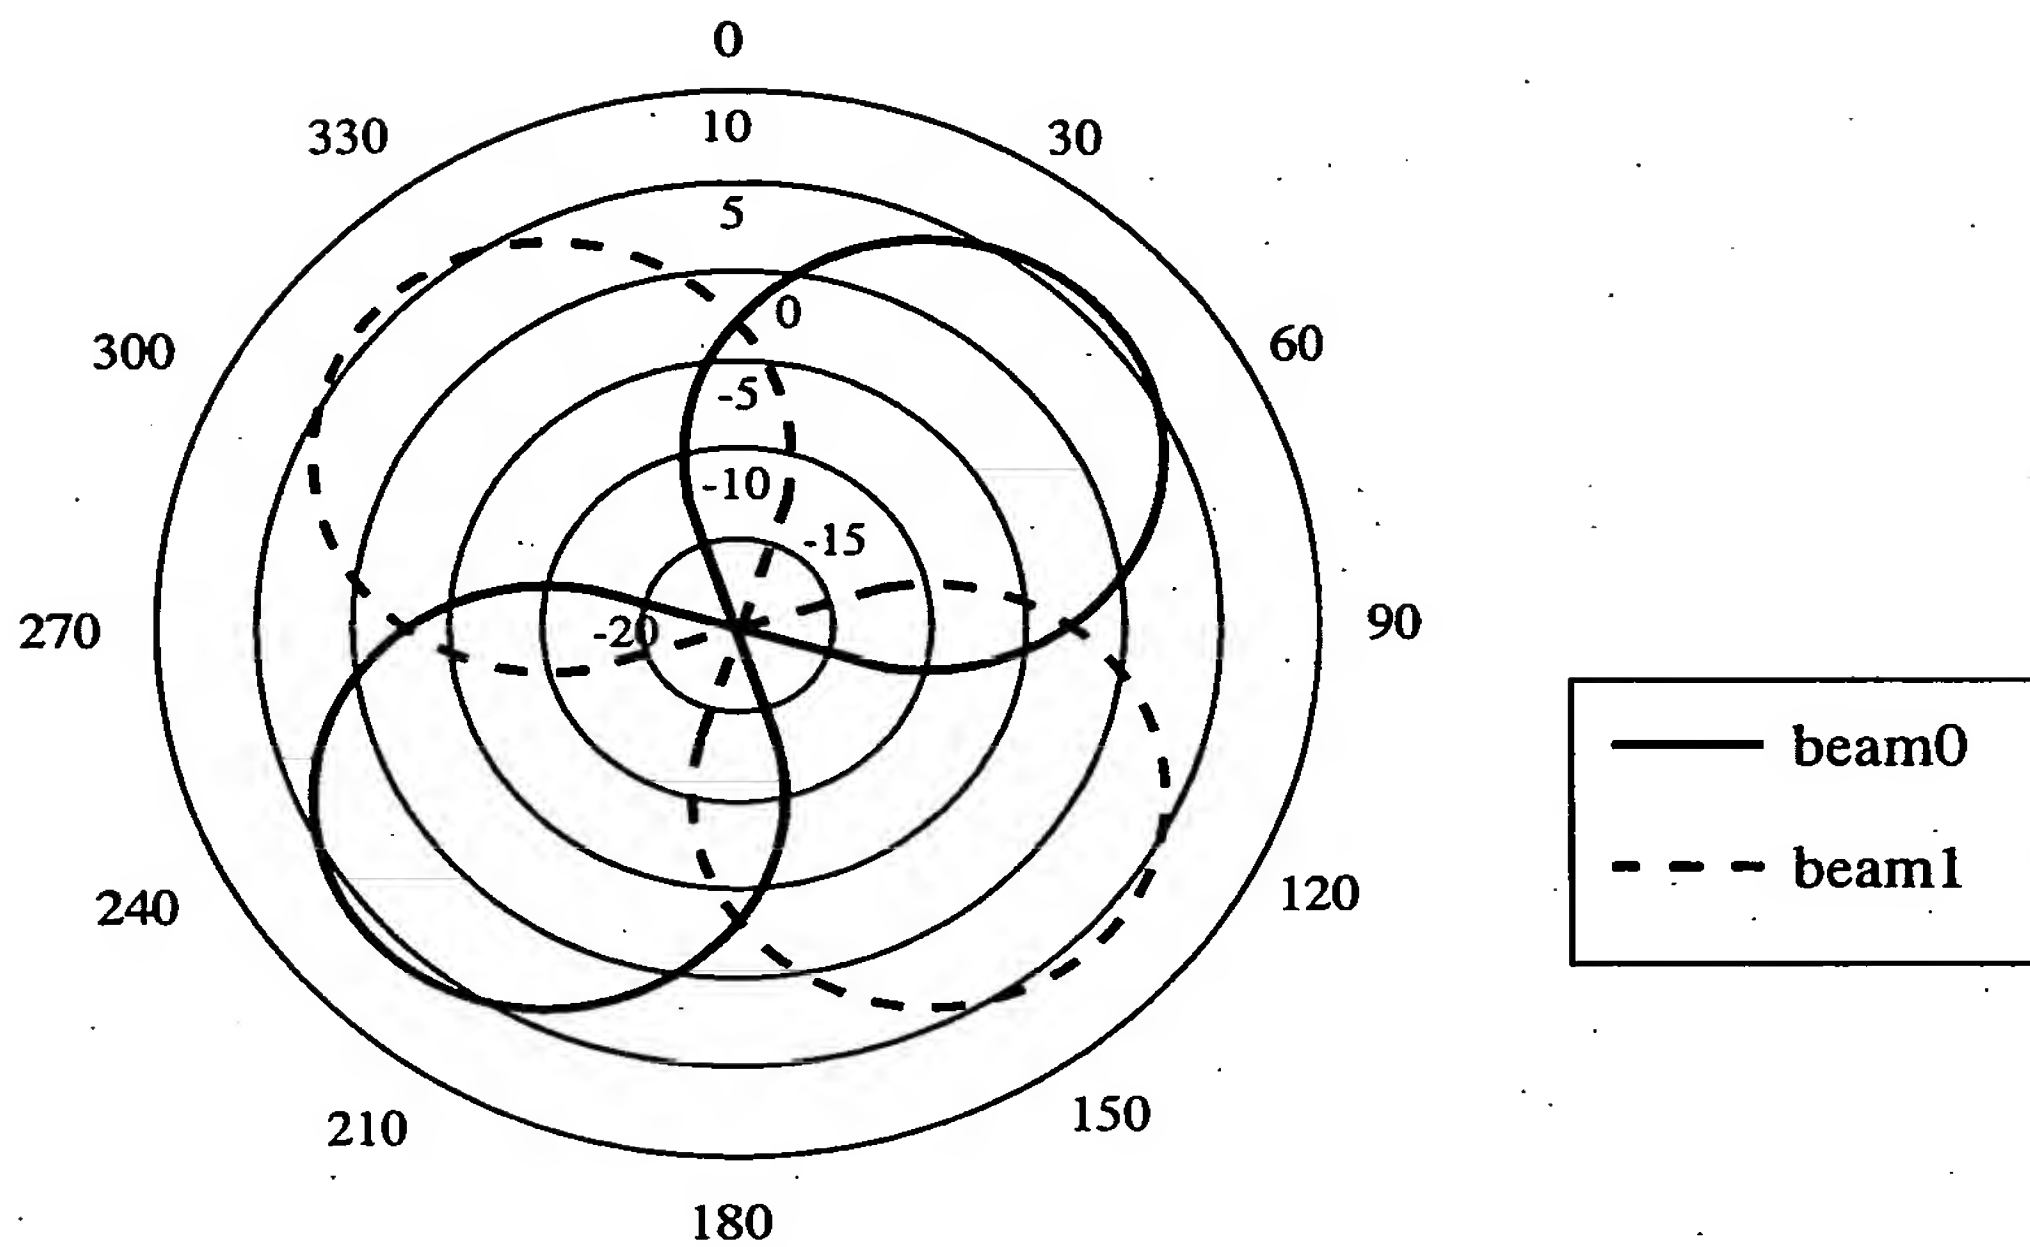


FIG.6

Received beams	Transmission beam to be selected	Selecting conditions
beam0	beam0	No conditions
beam1	beam1	No conditions
beam0 and beam1	beam2	When receiving paths with same delay in received beams beam0 and beam1 have opposite phases
	beam3	When receiving paths with same delay in received beams beam0 and beam1 have same phase

5/7

FIG. 7


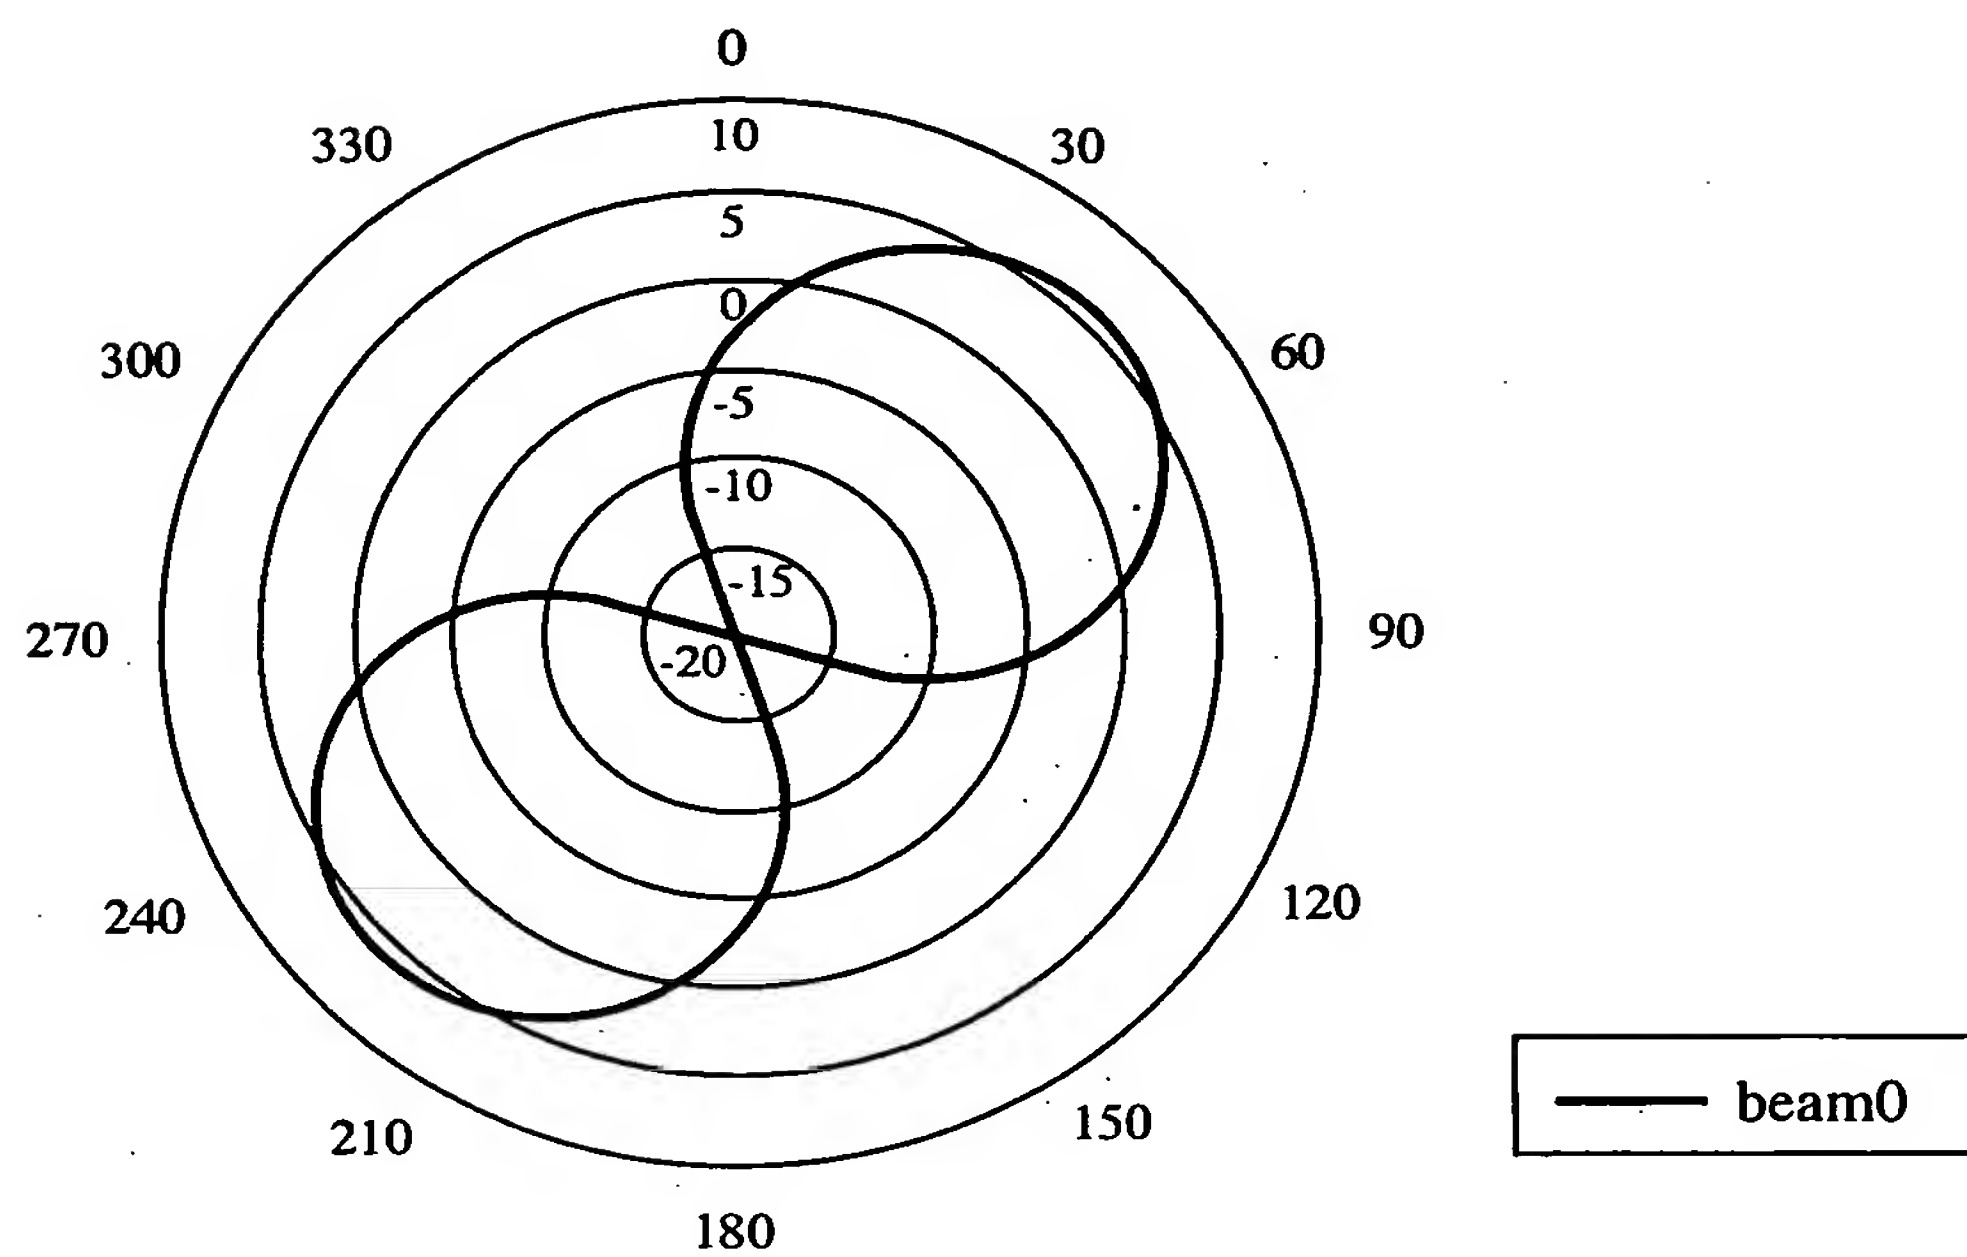


FIG. 8

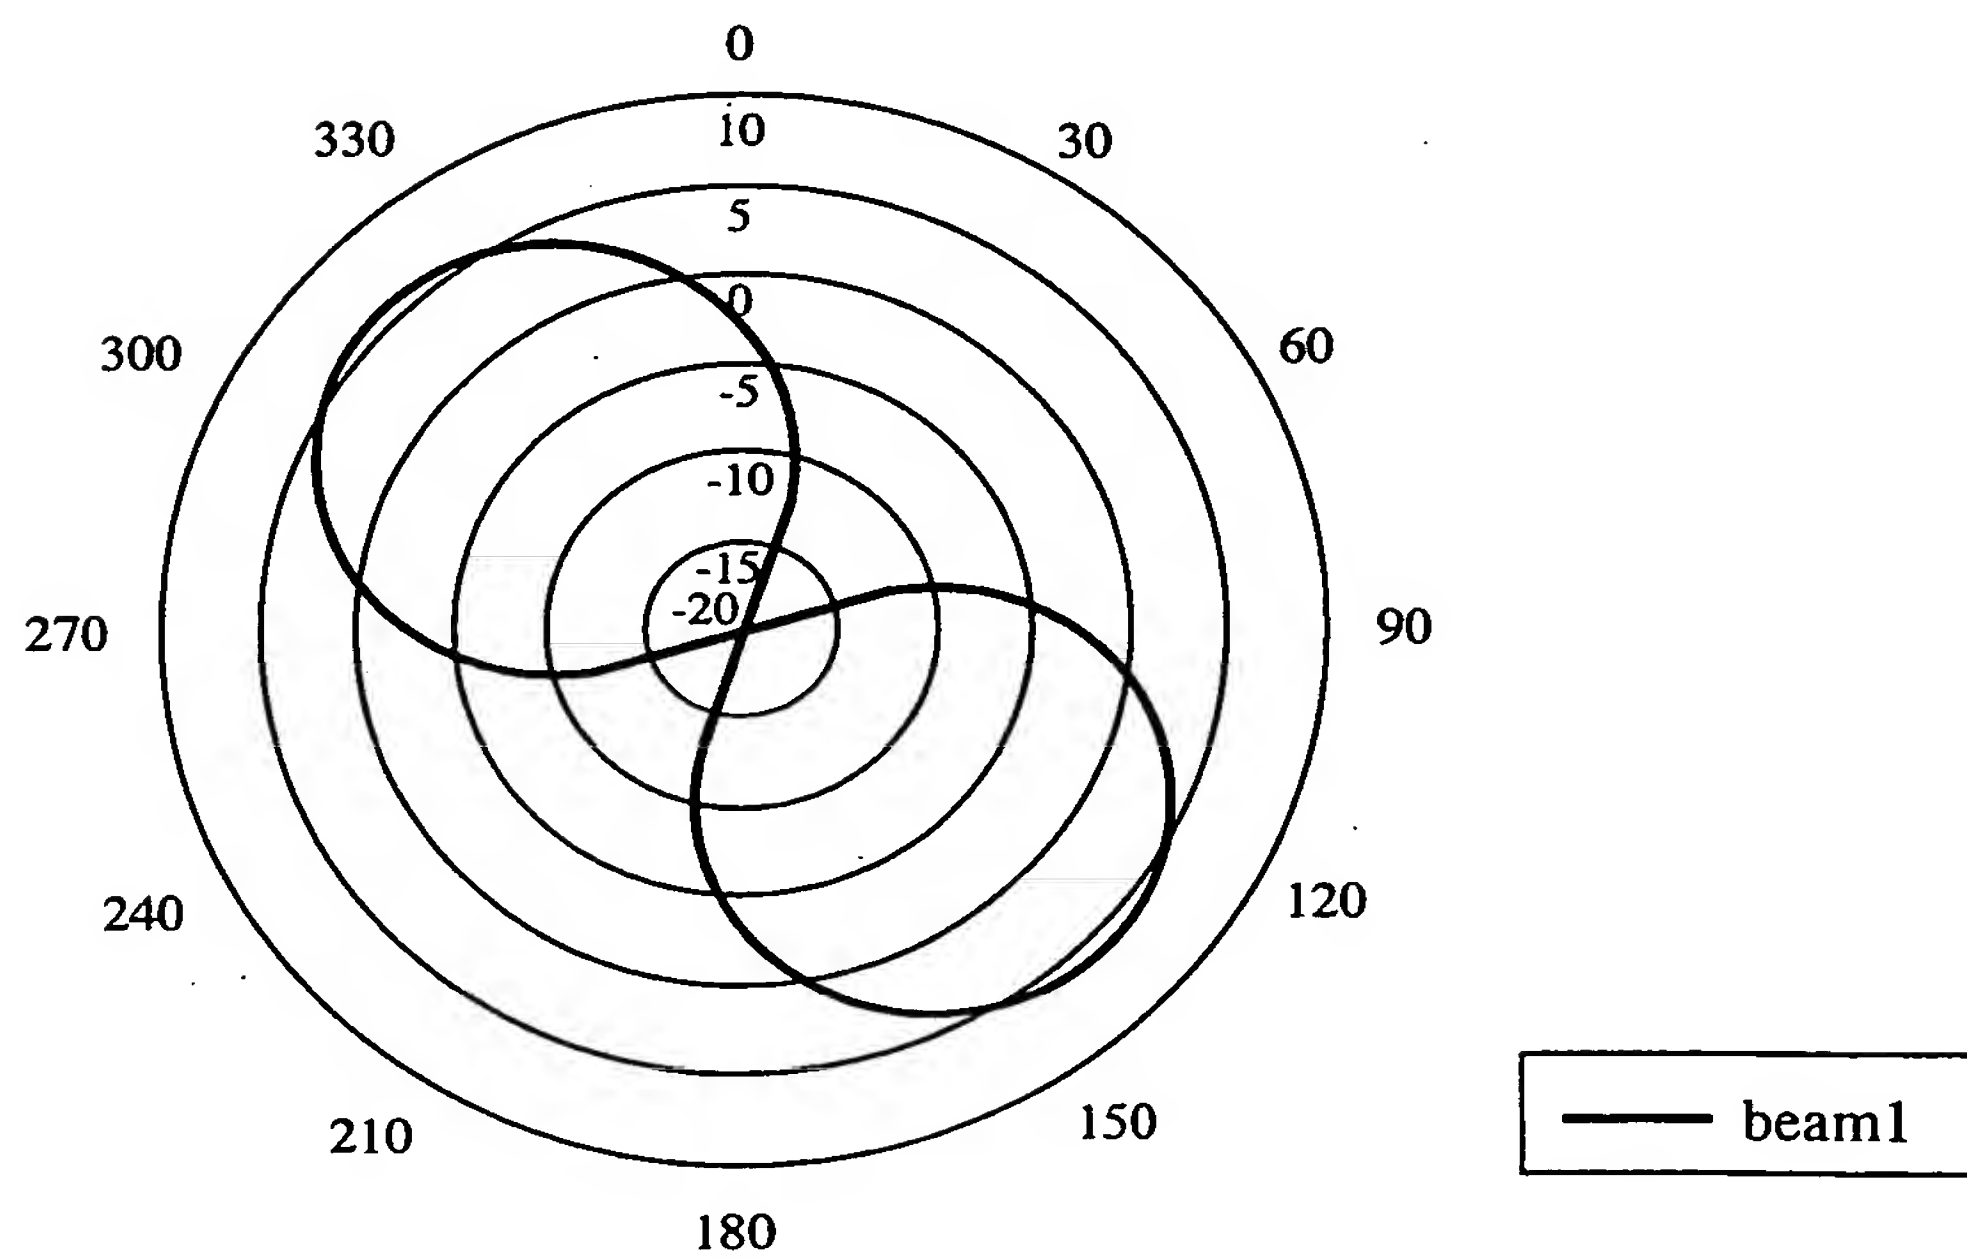

6/7

FIG.9

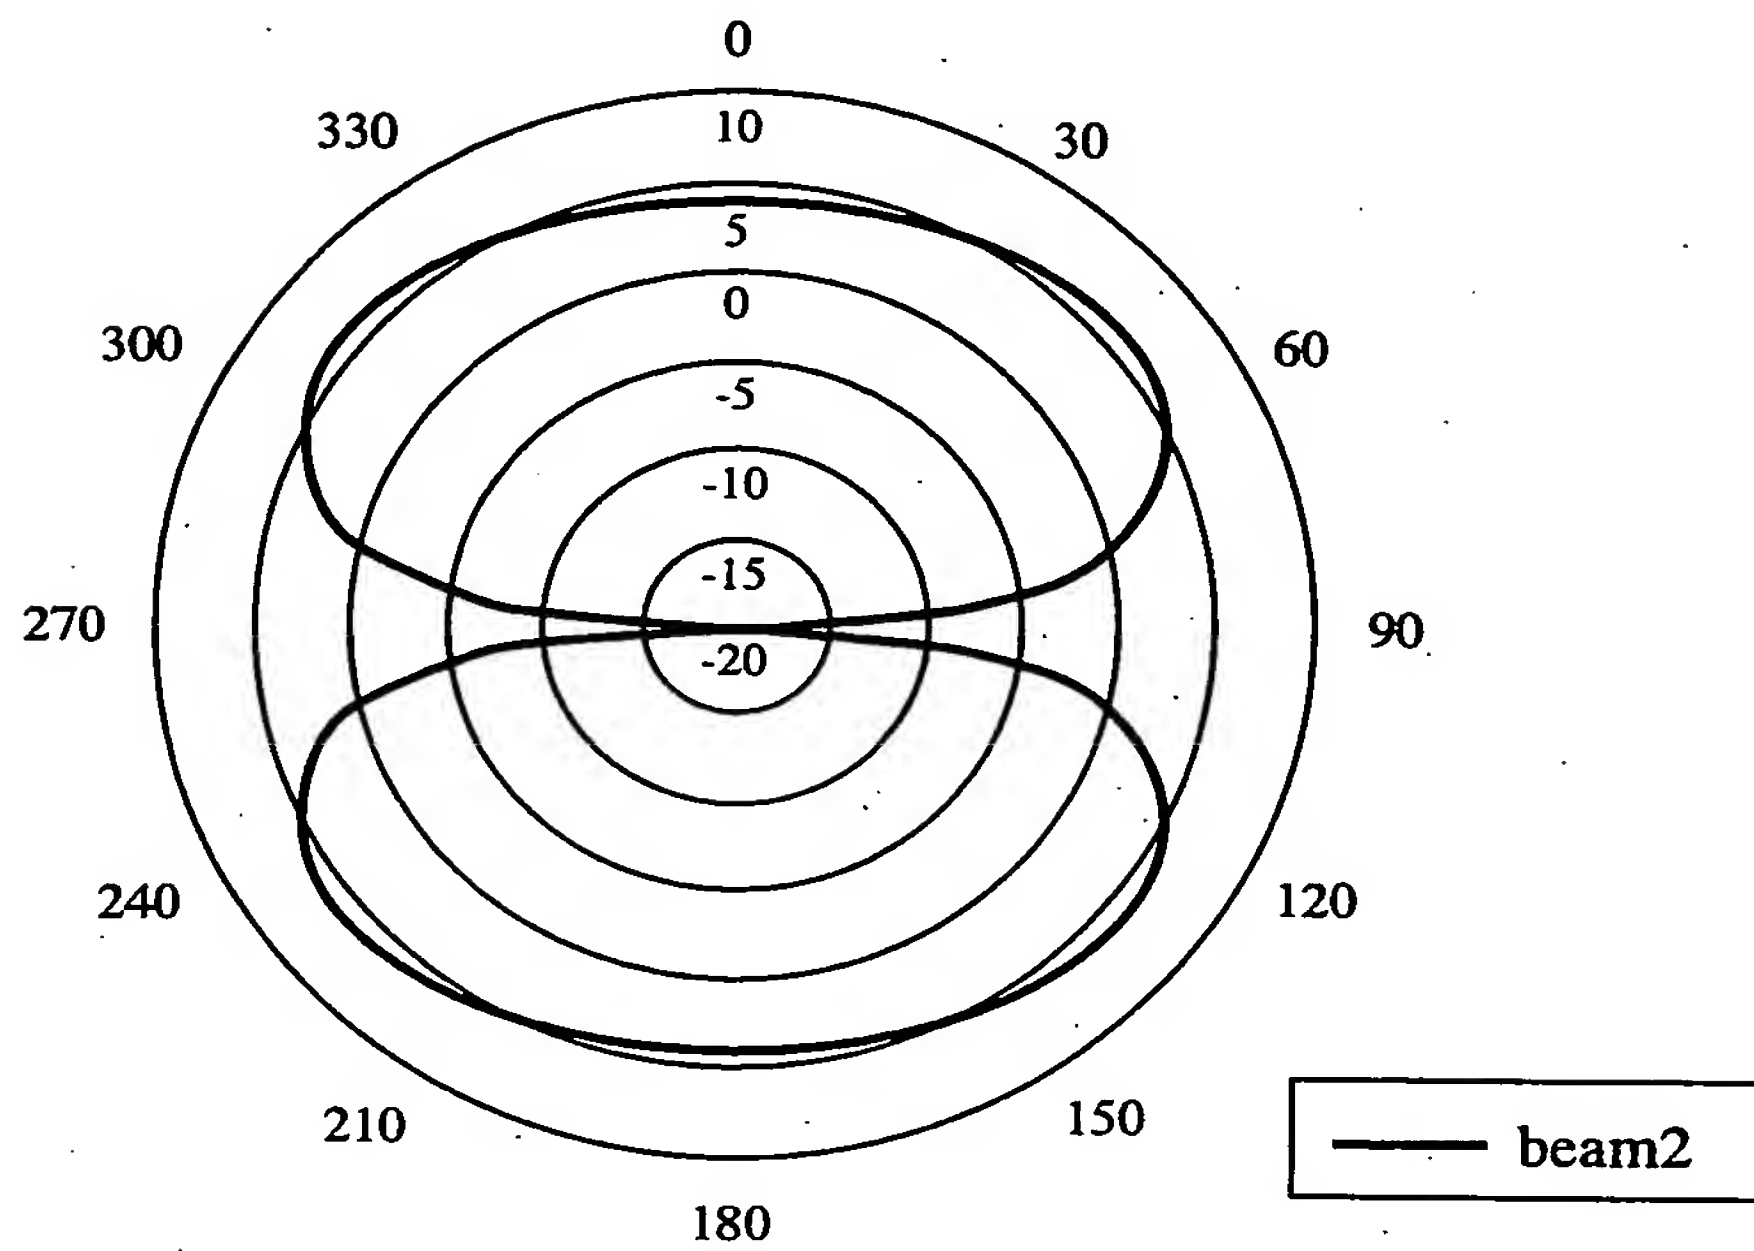


FIG.10

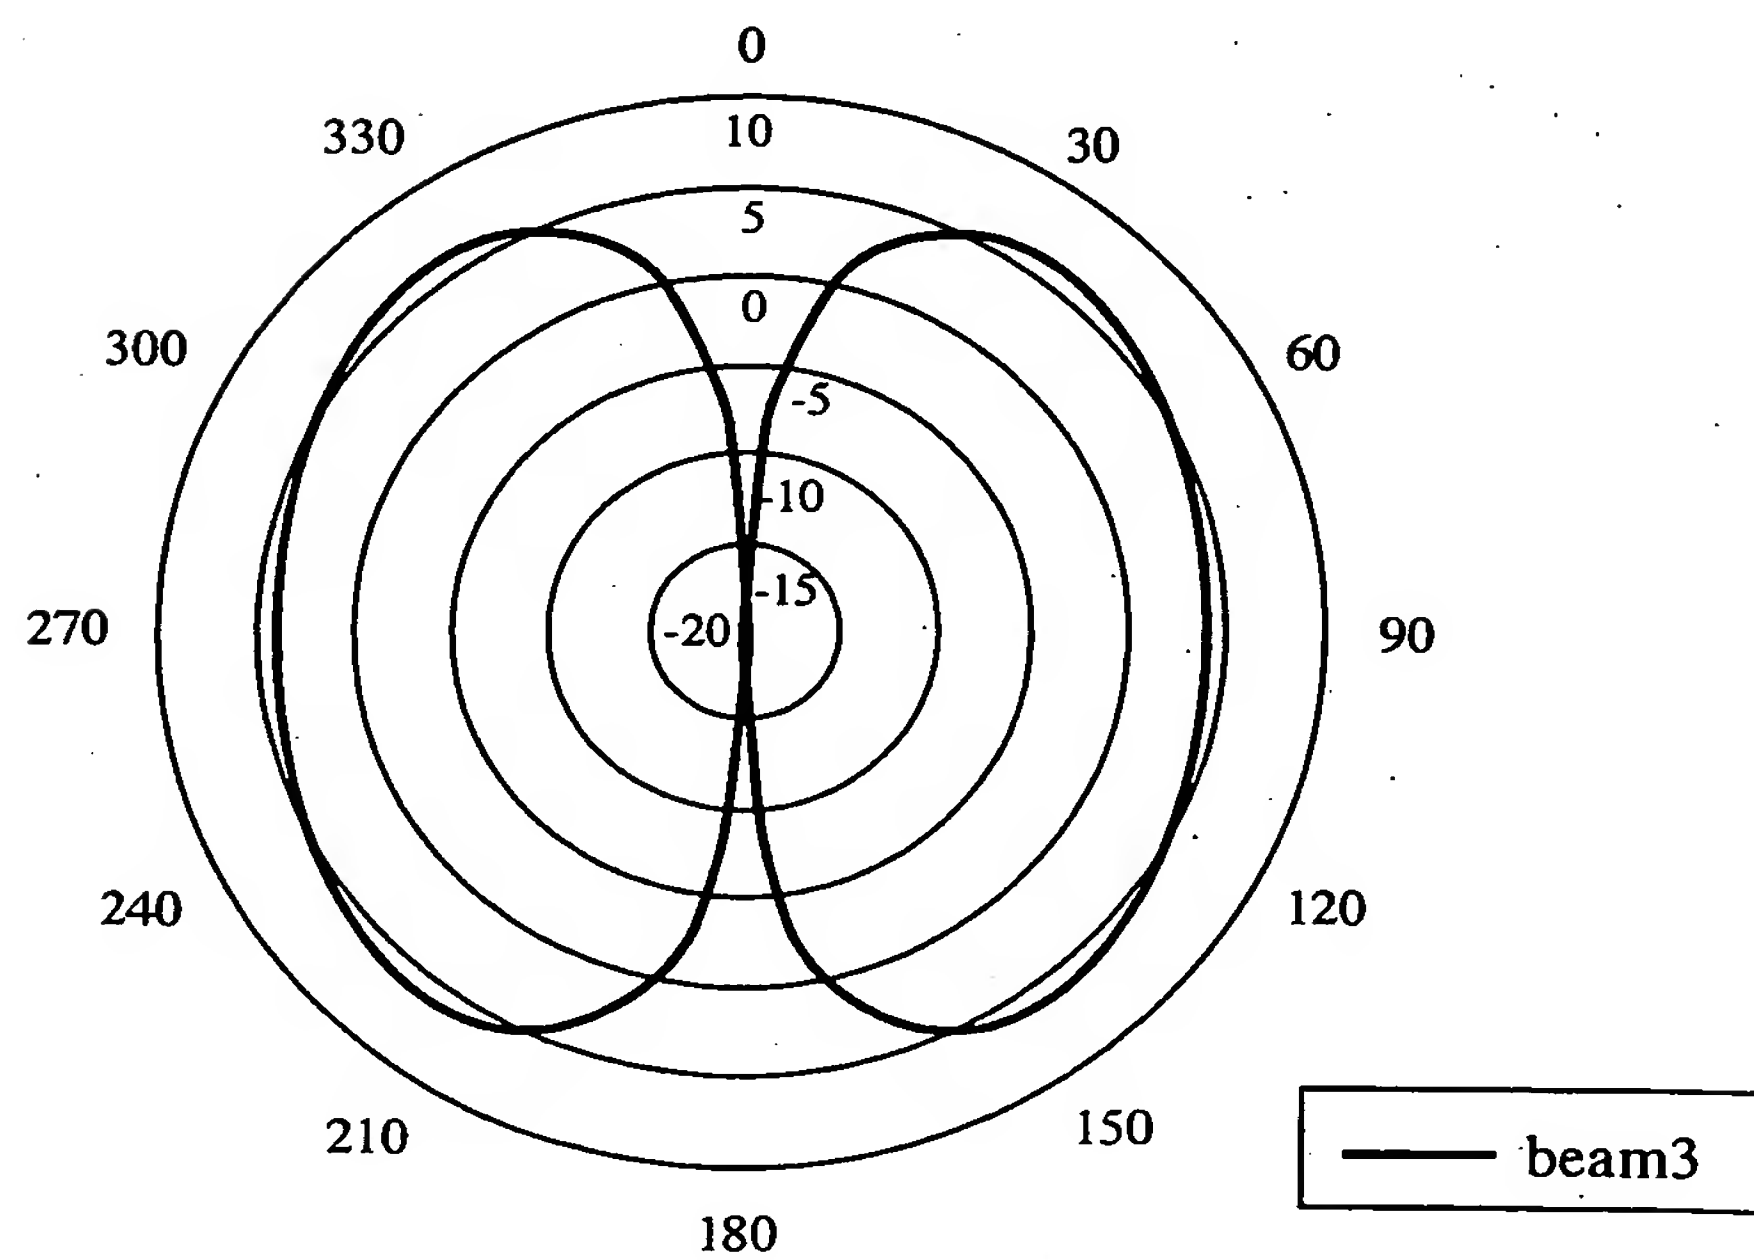


FIG.11

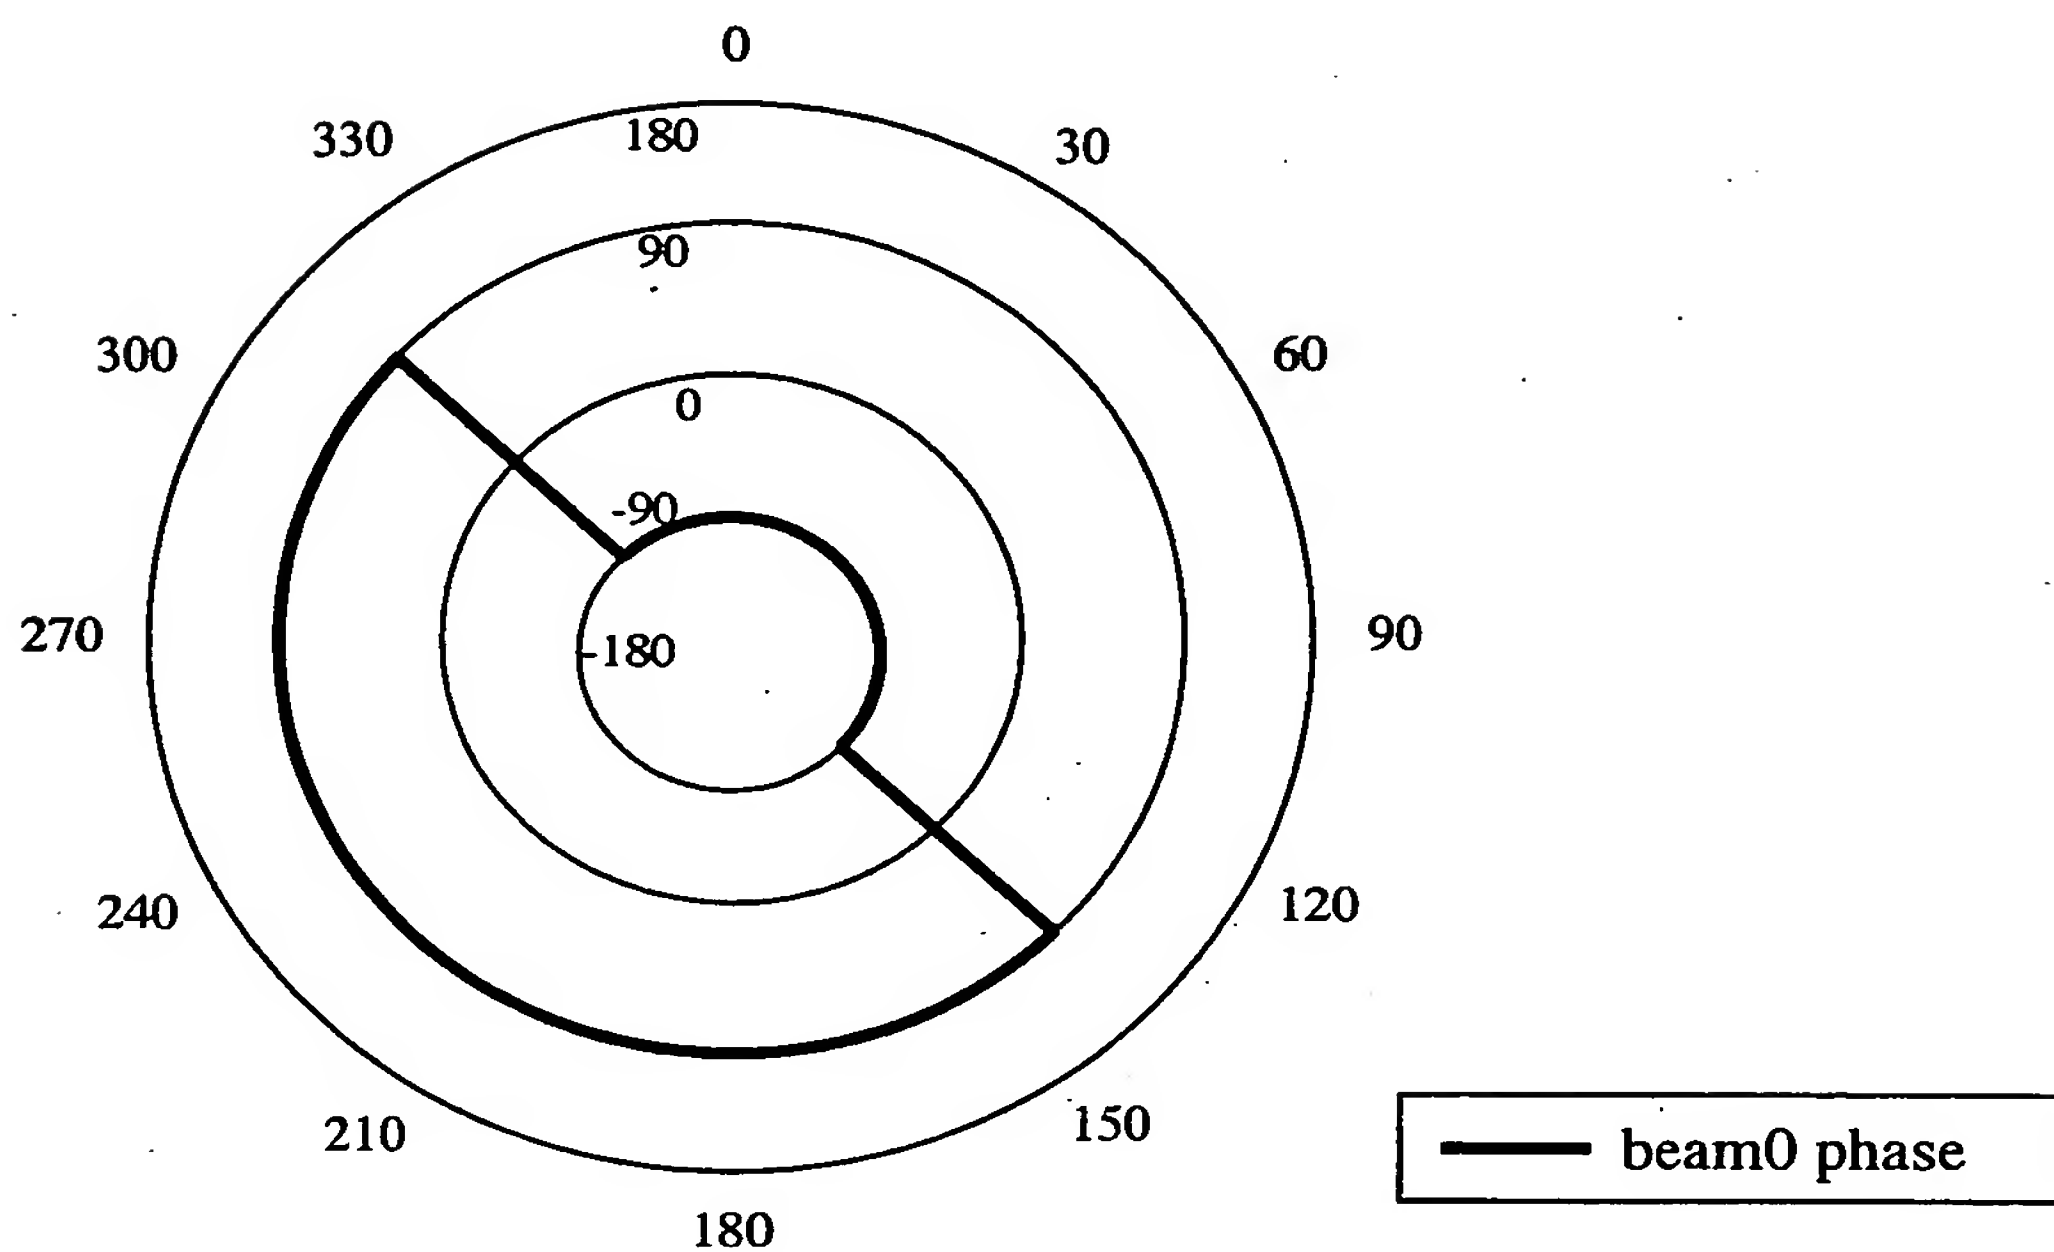


FIG.12

